

Amphenol ANYTEK


General Relay

AHQ



Max. allowable current: 16A
Contact rating: 16A 277VAC / 16A 24VDC

AWH

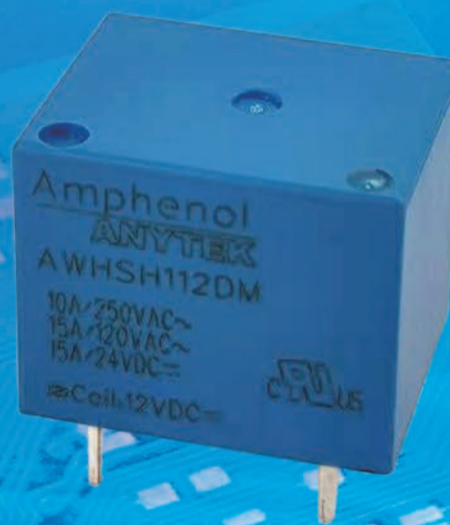


Max. allowable current: 15A
Contact rating: 15A 120VAC / 15A 24VDC

AKE



Max. allowable current: 8A
Contact rating: 8A 250VAC / 8A 30VDC

AMI

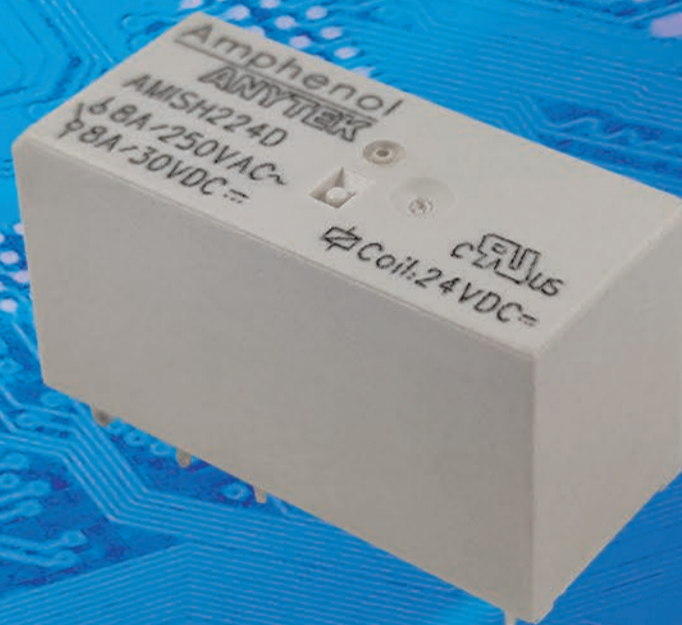

Max. allowable current: 8A
Contact rating: 8A 250VAC / 8A 30VDC

**Application: office equipment, household appliances,
audio equipment, building automation.....**